



12V 275GL+

Enginator generating system

Constant Speed Ratings

50 Hz: 2685 kWe @ 1000 rpm

60 Hz: 2410 kWe @ 900 rpm

Technical Data


Cylinders	12V
Piston displacement	13048 cu. in. (214 L)
Compression ratio	9:1
Bore & stroke	10.83" x 11.81" (275 x 300 mm)
Jacket water system capacity	100 gal. (379 L)
Lube oil capacity	220 gal. (883 L)
Fuel pressure range	45 – 60 psi (3.1 – 4.1 bar)
Starting system	150 psi (10.3 bar)

Dimensions l x w x h inch (mm)

307 (7801) x 94 (2377) x 140 (3556)

Weights lb (kg)

97,444 (44,200)

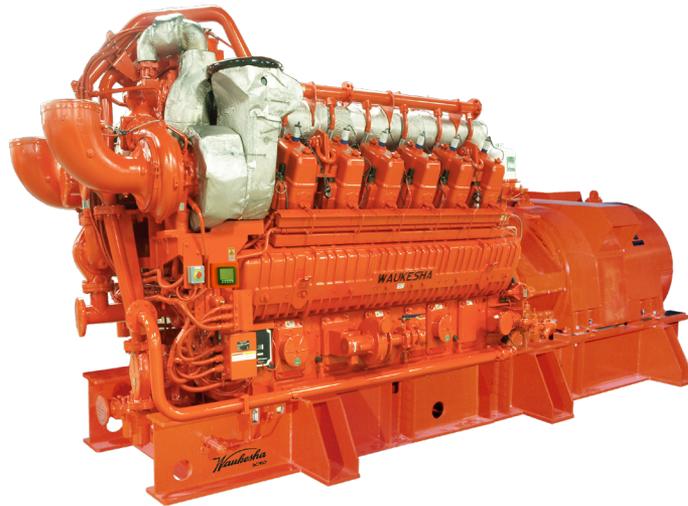

Designed to demanding specifications of the gas compression industry, INNIO's Waukesha* 275GL*+ Enginator is the right choice for rugged oilfield power generation and associated gas applications. A unique combination of robust construction and innovative technology, the 275GL+ lean-burn engine delivers fuel flexibility, power output and emissions for unmatched performance.

The 275GL+ features Waukesha's ESM* control, which integrates engine functionality into a single, closed-loop system with direct NOx measurement.

Key components such as the oil filters, oil cooler, pre-lube pump, and jacket water and auxiliary thermostats have been mounted on the engine, simplifying the packaging process and skid layout.

Technical Features

Feature	Description	Advantages
Single, closed-loop engine control system	Waukesha's proven ESM* control integrates the following into a single, closed-loop system: <ul style="list-style-type: none"> • Air/Fuel Ratio Control • Wastegate Control • Turbocharger Bypass Control • Ignition Timing • Knock Detection • Fault Monitoring 	Directly measures NOx emissions; adjusts operating parameters to prevent NOx emissions from exceeding 0.5 g/bhp-hr with limited manual intervention or setup
Best-in-class fuel flexibility	More power on more fuels, including full-load down to 600 Btu/ft ³ and operation up to 2300 Btu/ft ³	More power on more fuels means more profits without the additional costs associated with fuel treatment skids. The 275GL+ can achieve full load down to 60% methane and 70% load on pure ethane.
Best-in-class fuel efficiency	Efficiency advantage at full speed and load; advantage increases at partial speeds and loads	Minimize fuel costs and maximize profits across the entire range of speed and load combinations
High Temperature Capability	Operation allowed in ambient temperatures up to 140 °F (60 °C) with 150 °F (65 °C) intercooler water	Ability to operate in high temperatures where other generator sets cannot. Minimizes air conditioning/cooling costs while maximizing power output
High reliability with long maintenance intervals	Achieves up to 40,000 hours before top-end overhaul and 80,000 hours before bottom end	With low lifecycle costs and the ability to run up to 5 years continuously before overhaul, the 275GL+ is the best choice for the most remote, rugged, and demanding power generation applications.

Performance Data

Intercooler Water Temperature 130°F (54°C)		50 Hz 1000 RPM	60 Hz 900 RPM
Emissions	Power kW _e	2685	2410
	BSFC (LHV) Btu/bhp-hr (kJ/kWh)	6559 (9280)	6433 (9101)
	NOx g/bhp-hr (mg/Nm ³ @ 5% O ₂)	0.5 (230)	0.5 (230)
	CO g/bhp-hr (mg/Nm ³ @ 5% O ₂)	1.7 (771)	1.6 (723)
	NMHC g/bhp-hr (mg/Nm ³ @ 5% O ₂)	1.0 (457)	0.9 (420)
	THC g/bhp-hr (mg/Nm ³ @ 5% O ₂)	6.1 (2790)	6.0 (2803)
	Methane g/bhp-hr (mg/Nm ³ @ 5% O ₂)	5.1 (2333)	5.1 (2383)
	Formaldehyde g/bhp-hr (mg/Nm ³ @ 5% O ₂)	0.28 (129)	0.28 (129)
	CO ₂ g/bhp-hr (g/Nm ³ @ 5% O ₂)	385 (176)	378 (176)

All information provided is subject to change without notice. All technical and performance data to be released via SAA - please contact Application Engineering.

Consult your local Waukesha gas engine representative for system application assistance. The manufacturer reserves the right to change or modify without notice, the design or equipment specifications as herein set forth without incurring any obligation either with respect to equipment previously sold or in the process of construction except where otherwise specifically guaranteed by the manufacturer.

INNIO* is a leading solutions provider of gas engines, power equipment, a digital platform and related services for power generation and gas compression at or near the point of use. With our Jenbacher* and Waukesha* product brands, INNIO pushes beyond the possible and looks boldly toward tomorrow. Our diverse portfolio of reliable, economical and sustainable industrial gas engines generates 200 kW to 10 MW of power for numerous industries globally. We can provide life cycle support to the more than 48,000 delivered gas engines worldwide. And, backed by our service network in more than 100 countries, INNIO connects with you locally for rapid response to your service needs. Headquartered in Jenbach, Austria, the business also has primary operations in Welland, Ontario, Canada, and Waukesha, Wisconsin, US.

IWK-119018-EN

*Indicates a trademark
 © Copyright 2019 INNIO Waukesha Gas Engines Inc. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Find your local support online:
www.innio.com/en/company/providers

